RUSHMORE BUILDINGS
A family business proudly manufactured in Springfield, South Dakota!

120’ WIDE TRUSS BUILDING

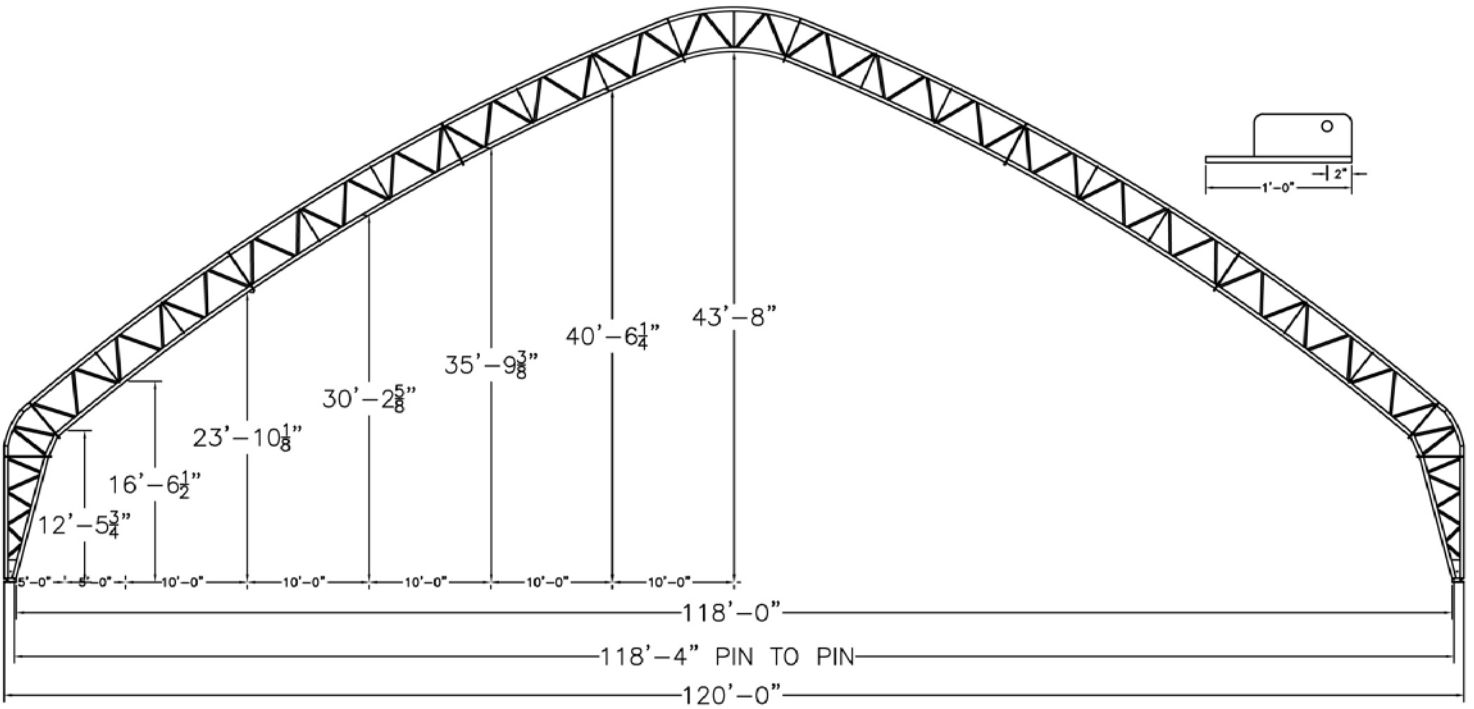

INTERIOR CLEARANCE

FRAME COMPONENTS

RAFTERS: Welded truss construction with an average top & bottom cord size of 4-inch 8 gauge.
RAFTERS AND PURLINS: Straight bracing configured to application
RAFTER SPACING: Offered in 8-foot, 10-foot, 12-foot and 14-foot truss spacing, with others available depending on local codes
PONY WALL MODELS: Designed to be set on concrete, or steel, with standard pivot bracket.
Note: also available in flush mount and ground mounted units.
Included: assembly bolts, lashing winches with mounting brackets.
Not included: posts**,** rub rail, or concrete anchors.

FABRIC COVER

FABRIC: 12.5 oz tear resistant high density polyethylene with individual keder panels with snap cap.
COLORS: White, Blue, Green, Red, Tan, Silver, Frost/translucent.
TENSIONING: Pipe and 2” lashing winch at each truss.

AVAILABLE OPTIONS

END WALLS: Steel uprights with fabric cover; pipe and 2” lashing winch tensioning.
END WALL SUPPORTS: Our standard uprights with tabs for customer supplied girts and skin.
HEADERS & DOORS: Door headers available. Fabric roll-up doors available.
RIDGE VENTS: 8X16 top vent holes, partial or entire length of building.
AWNING: 5ft awning greatly extends weather protection for buildings with feed-bunks or open sides.
SIDE CURTAINS: Roll-Up curtain to allow ventilation or wind protection. Electric curtain option available.

1314 Walnut St.
Springfield, SD 57062
www.RUSHMOREBUILDINGS.COM